


FOR TRUCKS:

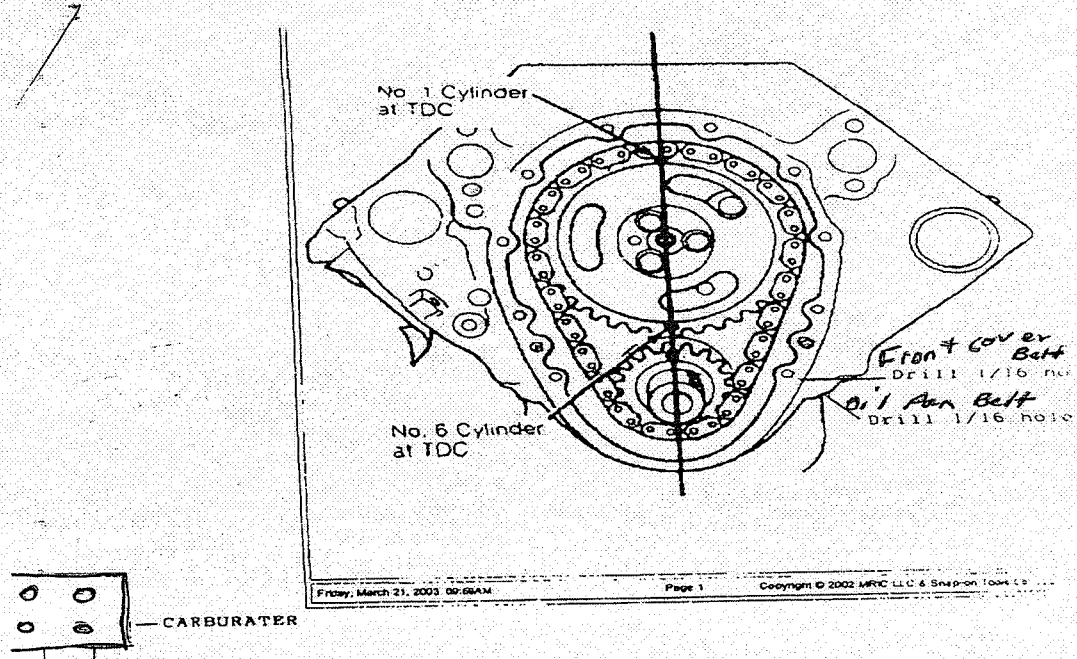


Drill 1/16 hole in top of front to stud bolts of carburetor mount bolts for seal to be placed.

Drill 1/16 hole in Head of each bolt for seal to be placed.

Seal will be placed and if removed for any reason you must report to Tech man before you pull at event.

* Pertains to all truck classes

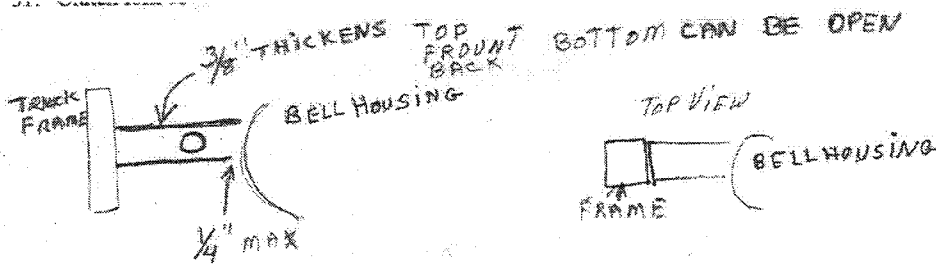

5800 LB SUPER STOCK 2WD TRUCK

Engine

- 1) 600 cubic inch maximum displacement. A one percent tolerance will be allowed for normal engine wear.
- 2) Vehicle must use a cast iron engine block.
- 3) Engine must be naturally aspirated.
- 4) One 4 barrel carburetor allowed. Carburetor must be a one-piece body (no split carburetors)
- 5) One 4 barrel carburetor automotive type intake manifold. (No sheet metal or tunnel-ram intake manifolds)

Frame

- 1) Custom built frames are allowed, if tubing is used in frame construction it is to be 4 sided tubing only. Wedge frames will be accepted.

2} Maximum length will be 15 feet 4 inches measured from the center of the rear axle to the front of the vehicle excluding the tow hook

3) Any size rear differential allowed. Planetary rear differentials will NOT be accepted

Hitch

1} Hitch may be no SHORTER than 42 inches measured from the center of the rear axle to the hook point.

2} Maximum hitch height is 30 inches

3} Hitch must be stationary in all directions

Body

1} Fiberglass is allowed for use in all body components and complete truck bodies.

2} No T-bucket type bodies will be accepted.

3} All trucks will be required to pull with the hood on completely covering the engine compartment.

4} All trucks will be required to use a complete firewall. The firewall will be the complete width of the driver's compartment and go from the dash panel to the floorboard. The firewall will be constructed of .060 material, acceptable materials are Lexan, steel, or aluminum.

5} All truck beds must be covered.

Transmissions

1} One OEM transmission allowed, aftermarket or custom cut gears will NOT be accepted

Tires

1} All tires will be D.O.T. approved.

2} Maximum tire size is 35x 12.50

3} Maximum rim width is 12 inches

Fuel

1} Acceptable fuels are gasoline and methanol

2} No oxygen carriers or combustion accelerators permitted

Miscellaneous

All trucks will be checked for cubic inch displacement and the transmission will be inspected prior to competing. Engines and transmissions must be sealed before competition.

Rules for this class are locked in through 2010